



**REGENCY®**  
HARDWOOD


Australian  
Select  
Timbers®

# Technical Data Sheet

## Regency Hardwood Herringbone Range



Example: Blackbutt

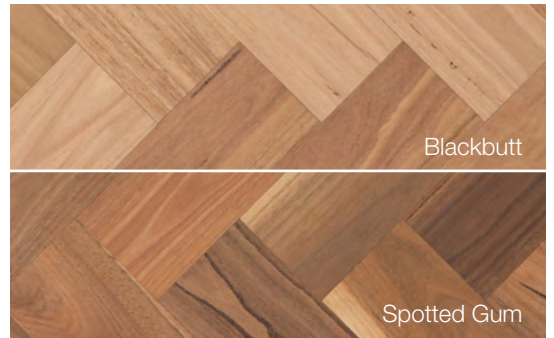

### General

<b>Size</b>	600mm x 120mm
<b>Thickness</b>	14.5mm
<b>Gloss Level</b>	Matte

### Commercial & Residential Applications

Board Type	Engineered Tongue & Groove
Pattern	1 / Single strip
Structure	8 layer multi-ply core, timber surface veneer
Edging	Bevelled edging
Pack Coverage	1.152m <sup>2</sup>
Pack Weight	12kg
Pack Length	600mm, 16 boards per pack- left and right reversed tongues
Top Layer	3mm Spotted Gum and Blackbutt
Timber Grade	Standard and Better
Surface Finish	UV lacquire 15-18 lacquer coats
Environmental Rating	A+
Maintenance	As per Australian Select Timbers timber flooring care & maintenance instructions - please refer to: <a href="http://asttimbers.com.au/technical/care-maintenance/">asttimbers.com.au/technical/care-maintenance/</a>

# Technical Data Sheet

## Regency Hardwood Herringbone Range

### Installation

Fully Bonded	Yes*
Nailed	No
Floated on underlay	No
Over heated slab	No

\* Please refer to our Installation Instructions.

### Grading Specifications

Colour Variation	Allowed
Filled Defects	Allowed
Sapwood	Max 10% width
Filler	Allowed
Maximum size of sound knots	40mm diameter
Maximum size of broken knots	Not Allowed
Heart/Pith	Trace
End Checks	Not Allowed
Insect Damage	Not Allowed
Ingrown Bark	Not Allowed

### Test Information & Others

Origin of Timber Veneer	Australia
Legally harvested timber	Yes
FSC	Available upon request
Janka hardness rating (Spotted Gum)	2473 LBF (11.0)
Janka hardness rating (Blackbutt)	1910 LBF (9.0)
Acoustic Result*	Ln w = 53
Slip Testing	AS/NZS 4586-2013 Result: 0.49, Classification: D1
Australian Reaction to fire - FLOOR	AS/ISO 9239-1:2003 Result CRF 2.6 kw/m <sup>2</sup> , smoke value 25%
Australian Reaction to fire - WALL	AS/NZS 3837:1998 Result: 46.8kw/m <sup>2</sup>
Cigarette Burns	Repairable
Release of formaldehyde	ASTM D5116 Result 0.009mg/m <sup>2</sup> /hr (max allowable 0.1)
Release of 4-phenylcyclohexene	ASTM D5116 Result 0.005mg/m <sup>2</sup> /hr (max allowable 0.05)
Total VOC	ASTM D5116 Result 0.101mg/m <sup>2</sup> /hr (max allowable 0.5)
Warranty - Domestic	20 Year Wear & Lifetime Structural
Warranty - Commercial	5 Year Wear & Lifetime Structural

\* All testing conducted on 200mm thick concrete slab with a 3mm Select EVA underlay and with 35mm furring channels using floated installation method and a single layer of 10mm standard plasterboard ceiling as per B.C.A requirements. Please contact Australian Select Timbers for further information regarding this test result.

### Installation & Warranty

All Australian Select Timbers' floors must be installed by a competent approved installer who has all the necessary skills and take individual site circumstance into account. Australian Select Timbers warranty will only apply to floors which have been installed according to the AST installation instructions available in each box and also on the website - [asttimbers.com.au](http://asttimbers.com.au)



Terms & Conditions: Please note this technical sheet was written by Australian Select Timbers Pty Ltd, All the information is specified correctly while writing and publication of the sheet. The company reserves the right to change the specifications of this product at any time without prior notice to third parties.

Regency Hardwood by Australian Select Timbers Pty Ltd. PO Box 4320 Dandenong South, Victoria 3175

[www.asttimbers.com.au](http://www.asttimbers.com.au) | 1300 901 355